

样品承认书

SAMPLES SPECIFICATION FOR APPROVAL

Switching power Supply/开关电源

客户:

CUSTOMER: _____

产品描述:

DESCRIPTION: Input:100-240V ~ 50-60Hz Output: 5VDC 2A

机种型号:

OUR MODEL NO: _____ MX15Z-0502000VU

样品编号:

日期:

SAMPLE NO: MX1700090

DATE: 2017-02-16

客户编码:

产品颜色/SAMPLE COLOR:

Customer part number: _____

Black White

APPROVAL SIGNATURE/客户确认		
核准/APPROVED BY	审核/CHECKED BY	检测/TESTED BY
Manufacturer/制造商		
核准/APPROVED BY	审核/CHECKED BY	制定/MAKER
李四伟		

Ideal Power Ltd

14 Larks Way, Tree Beech Enterprise park, Gunn,

Barnstaple, Devon, England EX32 7NZ

Tel: +44 (0) 845 2603400 Email: sales@idealpower.co.uk Web: www.idealpower.co.uk



Ideal Power Ltd

版本目录/Rev. List			
版本/Rev.	日期/Date	描述/Description	制订/Design
A0	2017-02-16	新版本/New Rev.	陈鹏飞

目录/Table of contents

1、描述/DESCRIPTION.....	3
2、输入特性/INPUT CHARACTERISTICS.....	3
3、输出特性/OUTPUT CHARACTERISTICS.....	4
4、保护功能/PROTECTION FUNCTION.....	5
5、环境要求/ENVIRONMENTAL REQUIREMET.....	5~6
6、安全要求/SAFETY REQUIREMENT.....	6
7、结构参数/MECHANICAL REQUIREMENT.....	7
8、线材/CORD.....	8
9、铭牌附图/LABEL.....	9
10、样品测试报告/SAMPLES ELECTRICAL TEST REPORT.....	10





Ideal Power Ltd

1、描述/ DESCRIPTION:

该开关式电源的连续输出功率为 10 W.

The S.M.P.S should be capable of a total continuous DC power output of 10 W atts.

2、输入特性/INPUT CHARACTERISTICS:

2.1 输入电压/Input Voltage:

额定电压/Rated Voltage: 100-240 Vac

调整范围/Variation Range: 90-264 Vac

2.2 输入频率/Input Frequency:

额定频率/ Rated Frequency: 50-60 Hz.

调整频率/Variation Frequency: 47-63 Hz

2.3 输入电流/Input Current:

当输入交流电压为额定值的下限电压负载满载时,最大输入交流电流 0.4 A.

0.4 Amps max At any input voltage and rated, DC output rated load.

2.4 浪涌电流/Inrush Current:

冲击电流峰值在额定电压输入, 冷启动 (25°C) 时, 不大于 30A ;且在任何负载和输入条件下, 不导致永久性损坏或危险.

Impact current peak in the rated voltage input, cold start (25 °C), not more than 30 A; And in any load and input conditions, don't cause permanent damage or dangerous.

2.5 AC 漏电流/Ac Leakage Current:

当输入电压 240Vac 时,最大漏电流为 0.25mA./ 0.25mA Max.At240Vac input.

2.6 Stand-by power consumption ≤ 0.075 Watts.

待机功耗 ≤ 0.075 W.



Ideal Power Ltd

3、输出特性/OUTPUT CHARACTERISTICS:

3.1 输出功率/Power output

电压 Voltage	最小负载 Min. Load	额定负载 Rated. Load	输出功率 Output power
5Vdc	0.01A	2A	10W

3.2 输出特性/Output Characteristics

电压 Voltage	最小负载 Min. Load	额定负载 Rated. Load	电压范围 Voltage Range	
5Vdc	0.01A	2A	空载电压 (V)	负载电压 (V)
			4.75-5.4	4.75-5.4

3.3 纹波和噪音 Ripple and Noise:

测试条件:在输入 115/230Vac 25°C 和输出最小及最大负载时, 使用示波器带宽为 20MHz 连接到适配器的输出端, 同时输出端并联一个 47uF 的电解电容和一个 0.1uF 的瓷片电容.

At 115/230Vac 25°C input and output Min and Max.Load,the ripple and noise are as follows when measure with Max.Bandwidth of 20MHz and Parallel 47uF/0.1uF,crossed connected at testing point.

电压	最大纹波/最大噪音
Voltage	Ripple and Noise(Max.)
+5Vdc	80 mV p-p

3.4 启动延迟时间/Turn on delay time:

当输入 100Vac 和输出最大负载时,最大启动时间为 3 S.

3 Second Max.at 100Vac input and output Max.load.

3.5 保持时间/Hold up time:

当输入 115Vac 和输出最大负载时,最小保持时间为 5 mS.

5 mS Min.at 115Vac input and output Max.Load.

3.6 效率/Efficiency:

当 115/230Vac 输入电压时, 1/4, 1/2, 3/4 和满载计算平均效率, 最小 78.71%, 适配器满足能效 VI.

78.71%Min.At 115/230Vac input voltage,1/4, 1/2, 3/4 and full load calculation average efficiency. Adapter meet efficiency lever VI.





Ideal Power Ltd

4、保护功能/PROTECTION FUNCTION:

4.1 短路电路保护/Short circuit protection:

该电源供给器在短路解除时能正常工作恢复.

The power supply will be auto recovered when short circuit faults remove.

4.2 过流保护/Over current Protection:

过流故障排除后,电源将自动恢复正常工作.

The power supply will be auto recovered when over current faults remove.

5、环境要求/ENVIRONMENTAL REQUIREMET:

5.1 工作温度/Operating Temperature:

0□-40□,满载,正常工作.

0□ to 40□,Full load, Normal operation.

5.2 储藏温度/Storage Temperature:-20□ to 60□

带外壳/With package

5.3 工作湿度/Relative Humidity:

5%(0□)-90%(40□),72 小时,满载,正常工作.

5%(0□)-90%(40□)RH,72Hrs,Full load, Normal operating.

5.4 振动/Vibration:

1. 测试标准:国际电工电子委员会

Operating: IEC 721-3-3 3M3

5~9Hz,A=1.5mm

加速度(9~200Hz,Acceleration 5m/S²)

2. 运输/Transportation:

IEC 721-3-2 2M2

5-9Hz,A=3.5mm

9~200Hz,加速度 Acceleration=5m/S²

200~500Hz,加速度 Acceleration=15m/S²

3. 轴向振动/Axes,10 cycles per axis.

在测试过程中不能出现永久性的损坏.

No permanent damage may occur during testing.

在电源开启和关闭后,样机能够恢复到最初条件.

The SAMPLE has to restore to its original situation after power off/on..





Ideal Power Ltd

5.5 跌落试验/Dropping Packed:

插墙式跌落高度为 1 米、桌面式跌落高度为 760mm、6 个面各跌一次

1M for wallmount type and 760mm for desktop type as above described, 6 surfaces or one

测试台面是厚 13mm 的夹木板, 离地面高 19-20mm

The horizontal surface Consists of hardwood at least 13mm thick,mounted on two layers of plywood each 19mm to 20mm thick,all supported on a concrete or equivalent non-resilient floor.

6、安全要求/SAFETY REQUIREMENT:

6.1 主熔断器/ MAIN FUSE

1 Ω 保险电阻 Safety Resistor is 1 Ω

6.2 安全: 符合标准 AS/NZS60950.EN60950.UL60950; Safety: accord standard with with AS/NZS60950.EN60950.UL60950 ;

电磁兼容标准 EMC-Specification : .EN55022/EN55024.AS/NZS CISPR22. FCC Part15.C-TICK;

1. 干扰噪声抑制标准 Noise-suppressed acc : IEC55022 ;

2.谐波电流的抑制标准 Harmonic current measurement acc : IEC61000-3-2 ;

3.抗静电的承受标准 Immunity to electrostatic discharge(ESD)acc:IEC61000-4-2 ;

空气放电 Air discharge: ± 8KV ; 接触放电 Contact discharge: ± 4KV ;

4.抗干扰抑制标准 Immunity to radiated electromagnetic field acc:IEC61000-4-3;

测试条件 Test characteristic: 80-1000MHZ; 80%AM(1KHz) 检验条件 Test level 3V/m : A ;

5. 抗快速脉冲群标准 Immunity to fast electric transients(burst)acc: IEC61000-4-4;

耦合方式 Coupling On power supplylines 测试条件 Test Level: 1KV Assessment criteria 评估标准: B ;

6.浪涌测试标准 Surge capability acc: IEC61000-4-5;

浪涌电压 Surge voltage: 1KV Assessment criteria 评估标准: B ;

7. 抗骚扰测试 Injected currents susceptibility acc: IEC61000-4-6;


测试条件 Test Level: 3V/m Assessment criteria 评估标准: A ;

6.3 高压/DIELECTRIC STRENGTH Hi-Pot:

输入对输出/INPUT to OUTPUT :3000Vac/5mA/60S or 4242Vdc/5mA/60S for type test.

(批量生产时/ Batch production: 3300Vac/5mA/3S)

1. Between input and output < 输入 (2pin 脚短路) --- 输出 (正 , 负极短路)



2.电压输出变化曲线 Voltage time graph





Ideal Power Ltd

6.3 绝缘抗阻/Insulation resistance:

输入对输出/INPUT to OUTPUT $10M\Omega$ min at 500V DC.

7、结构参数/MECHANICAL REQUIREMENT:(单位: mm)

7.1 外壳/Enclosure:

外壳尺寸: L62x W39.2x H35mm;

The power supply size:L62x W39.2x H35mm;

7.2 输入线/Input Connector:


2 Pin EU US UK SAA 插脚/Two pin input plug of EU US UK SAA.

7.3 输出/Output

USB 大四 PIN 1 正 4 负,2、3PIN 短路.

USB PIN 1 positive, PIN 4 negative, PINS 2,3 short circuit.

8、外观图 OUTLOOK DRAWING: mm

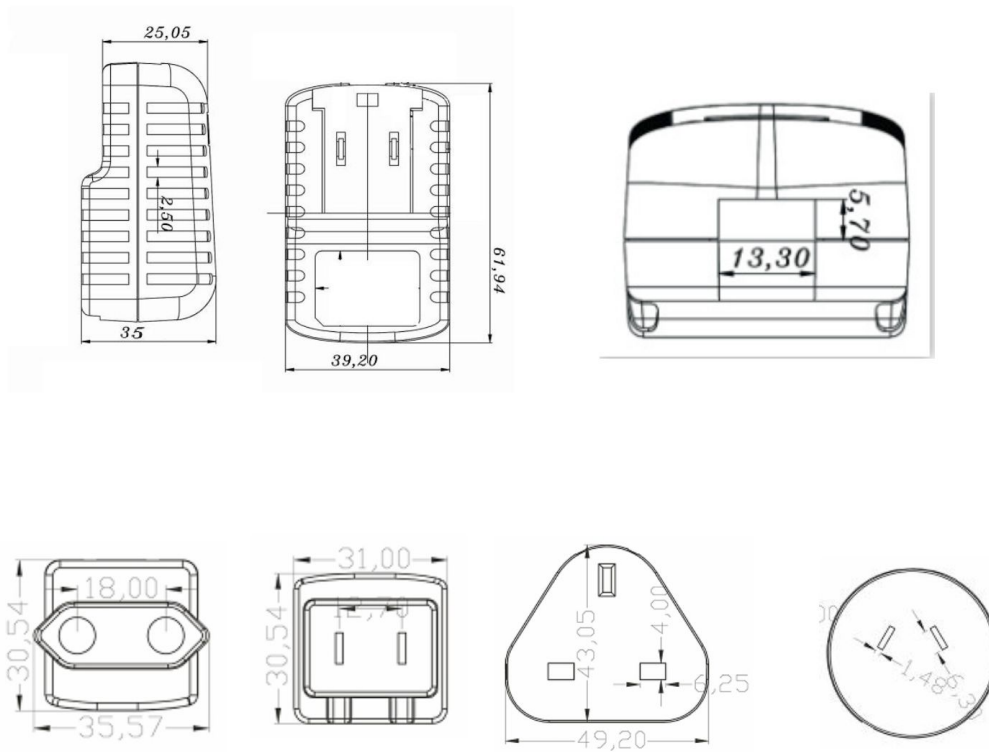

VAT No. GB 771 1607 40

Registered in England No. 4063412

Weee Reg. WEE/DD0749YY

+44 (0) 845 260 3400

enquiries@ideалpower.co.uk

ideалpower.co.uk

Ideal Power Ltd.
14 Larks Way
Tree Beech Enterprise Park
Gunn, Barnstaple
Devon, EX32 7NZ
England, UK



Ideal Power Ltd

8、线材/CORD:(单位: mm)

Ideal Power Ltd

9、铭牌/LABEL:(单位: mm)



NOTE:

1. 颜色/Color: 黑底银字;
2. Black ground silver character;
3. 材质/Material: 50# 肖银龙+上光膜/Thickness: 0.2mmT;
4. 误差/Tolerance: +0/-0.2mm;
5. 环保/RoHS;



Ideal Power Ltd

10、样品测试报告 / SAMPLES ELECTRICAL TEST REPORT :

Sample form		sample (1)					Spec. Limit	Pass/ Fail
No	Test Items /测试项目	Unit / 单位	Test condition & result					
			90V	115V	230V	264V		
1	Unload input power 空载输入功率	W	0.02	0.03	0.06	0.09	≤0.075W	PASS
2	Power factor 功率因数	/	0.596	0.554	0.443	0.406	/	/
3	Rated load input power 额定负载输入功率	W	12.47	12.30	12.40	12.47	≤13W	PASS
4	Unload output voltage 空载输出电压	V	5.31	5.31	5.31	5.31	475-5.4	PASS
5	Rated load output voltage 额定负载输出电压	V	4.85	4.85	4.85	4.85	4.75-5.4	PASS
6	Output ripple&noise voltage 输出纹波及噪声电压	mV		68	50		≤80 mVp-p	PASS
7	Over current protection 过流保护点	A	2.8	2.9	2.95	3.05	2.1-4.0	PASS
8	Average Efficiency 平均效率	%		80.05	79.1		78.71	PASS
9	Short-circuit Protection 短路保护	W	not damage and with auto recovery function					PASS
Sample form		sample (2)						
1	Unload input power 空载输入功率	W						PASS
2	Power factor 功率因数	/					/	/
3	Rated load input power 额定负载输入功率	W						PASS
4	Unload output voltage 空载输出电压	V						PASS
5	Rated load output voltage 额定负载输出电压	V						PASS
6	Output ripple&noise voltage 输出纹波及噪声电压	mV						PASS
7	Over current protection 过流保护点	A						PASS
8	Short-circuit Protection 短路保护	W	not damage and with auto recovery function					PASS
		sample (1)/sample (2)						
1	Drop test 跌落试验	the Dropping height of wall mount type is 1M.6 surfaces Dropping respectively						PASS
2	appearance 外观	Content of the NP label is correct,the appearance is clear no spot,scratch color-difference,disconnection and gap						PASS
3	Burn-in test 老化试验	Input:230Vac/50Hz Full Load 4hrs						PASS
4	Insulation test 绝缘测试	INPUT TO OUTPUT:10MΩ min/DC500V,						PASS
5	Hi-pot test 介电强度	INPUT TO OUTPUT: 3000Vac/5mA/60S or 4242Vdc/5mA/60S						PASS
DATE/日期:2017-02-16		CHECK/审核:			APPROVED BY/核准:			
TEST/测试员: 陈鹏飞								

