



QALCOSONIC

E4

SMART ULTRASONIC HEATING AND COOLING METER

APPLICATION

QALCOSONIC E4 is a cost-effective smart ultrasonic heating and cooling meter designed for commercial metering of consumed energy where water is the heat carrier, such as residential buildings, enterprises, commercial premises, or heat supply facilities.

- Static flow metering using ultrasonic technology
- High accuracy
- For residential and commercial use
- Heating and cooling
- Modular design with replaceable battery
- MID DN15 – DN40* with the composite body flow part
- Available dimensions DN15, DN20, DN25, DN32

*DN40 available from 2022 Q4.

AMR INTERFACES, OPTIONAL



SPECIAL FEATURES

- Flexible meter configuration. Meter is delivered in a user configuration mode with the possibility to configure the meter parameters and features as units, mounting position, pulse inputs/outputs, communication ON/OFF, and other meter parameters
- Dual communication module options (RF/M-Bus, M-Bus/ M-Bus, LoRa/M-Bus)
- Measuring accuracy class 2
- Nominal flow 0,6 / 1,0 / 1,5 / 2,5 / 3,5 / 6/ 10 m³/h
- Dynamic range up to qp/qi = R 100/250
- No straight sections required
- No measurement of air
- Protection class IP65/67/68
- Nominal pressure PN16 bar
- Temperature measurement sensor type Pt500, from 0 °C to 90 °C
- Temperature of conveying liquid: from 0,1 °C to 90 °C
- Composite flow part
- Metering archive
- Battery lifetime > 15+1 years
- Power supply options: battery/external
- Optional communication modules
- Mounting in any installation position
- RF and M-Bus on-board (by request)
- Tariff functions

APPROVALS

- MID approval certificate
- EN1434
- 2014/32/EU

OPTICAL INTERFACE

Integrated into the front panel of the calculator. It is designed for data reading via M-Bus protocol and parameterisation of the meter.

RADIO INTERFACE

The internal radio provides data reading via wM-bus telegram: **S1, T1 OMS mode, LoRa.**

HOURLY, DAILY AND MONTHLY PARAMETER VALUES

- Integrated heat energy
- Integrated cooling energy
- Integrated energy of tariff
- Integrated volume of liquid
- Integrated pulse value in pulse input 1/2
- Maximum thermal power value for heating/cooling and date
- Maximum and maximum value of flow/return temperature of heat conveying liquid and date
- Average value of flow/return temperature of the heat conveying liquid
- Minimum value of temperature difference and date
- Operating time without an error
- Total error code
- Time when the flow rate exceeded 1.2 qs
- Time when the flow rate was less than qi

POWER SUPPLY:

Power supply (one of following depending on meter configuration):

- AA battery 3,6 V 2,4 Ah (Li-SOCl₂) battery, operation time at least 15+1 years
- 12..42 V DC or 12...36 V 50/60Hz AC external power supply, used current 10 mA and back up battery AA 3,6 V (Li-SOCl₂)
- 230 V (+10% - 30%) 50 / 60Hz AC power supply, current consumption is not more than 10 mA and back up battery AA 3,6 V (Li-SOCl₂)

TECHNICAL DATA:

Flow rate sensor	q_p [m ³ /h]	0.6 / 1.0 / 1.5 / 2.5 / 3.5 / 6.0 / 10.0
	Rq_p / q_i [m ³ /h]	100/250
	Resolution of flow-rate indicators:	00000,001 m ³
Technical data	LCD Display	8-digit
	Protection class [IP]	IP65/67/68
	Ambient temperature	+5°C ... +55°C
	Units (selectable by the user when installing):	kWh; MWh; GJ; Gcal; m ³
	Resolution of energy indicators (selectable by the user when installing):	000000,01 kWh, 0000000,1 kWh, 00000001 kWh, 00000,001 MWh (Gcal or GJ), 000000,01 MWh (Gcal or GJ)
	Installation position	all installation positions (vertical, horizontal, rising pipe, down pipe)
	Nominal pressure [bar]	PN16 bar
	Battery lifetime	15+1 years
	Flow sensor cable length	1,2 m
	Temperature sensor Pt500, two-wire connection, cable length	Up to 10 m
	Temperature measurement range	+0°C ... +90°C
	Mounting of calculator	Mounting on standard DIN-rail or on the wall
	Number of configurable pulse inputs/ outputs	2 or no (to be specified when ordering), OB -in the operating mode; OD - in the test mode

DATA LOGGER - HISTORY VALUES

Every hour, day, and month value of the measured parameters are stored in internal memory.


- All data from the archive can be read using the remote reading
- In addition, data logger records of monthly parameters can be seen on the display
- Hours for archive records: 1480 h
- Days for archive records: 1130 days
- Months for archive records: 36 months
- Archive data storage time: at least 36 months

Time of storage of all measured integral data, also without power supply to the electronic unit: at least 15 years.

LCD INDICATOR:

The device is equipped with an 8-digits LCD (Liquid Crystal Display) with special symbols to display parameters, measurement units, and operation modes

- The following information can be displayed:
 - integral and instantaneously measured parameters
 - archive data and set day data
 - device configuration information
- Programmable LCD displaying parameters

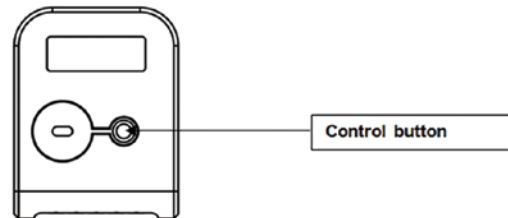

PULSE VALUE IN THE OPERATING MODE:

- When the output is configured for energy, the value of its pulses can be selected from the list (depending on the rated flow q_p and energy measurement units):

Energy pulse value, when units are "kWh" or "MWh"	0,00001 - 10 000 MWh/pulse
Energy pulse value, when units are "GJ"	0,0001 - 10 000 GJ/pulse
Energy pulse value, when units are "Gcal"	0,0001 - 1 000 Gcal/pulse

- When the output is configured for water quantity, the value of its pulses can be selected from the list (depending on the permanent flow q_p):


Water volume pulse value, m^3 /pulse	0,001 - 10 m^3 /pulse
--	-------------------------

- If the meter is ordered with the pulse input-output device, then a permanently connected 1,5 m length cable is fitted in the meter for connecting the inputs-outputs

Permanent flow-rate q_p , m^3/h	Upper flow-rate q_s , m^3/h	Lower flow-rate q_l , m^3/h	Threshold value of flow rate, m^3/h	Length of the flow sensor L, mm	Pressure losses at q_p , kPa	Joining to the pipeline (thread - G, flange - DN)
0.6	1.2	0.006	0.003	110	7	G3/4"
1	2	0.004	0.003	110	11.3	G3/4"
1	2	0.01	0.003	110	11,3	G3/4"
1.5	3	0.006	0.003	110	15	G3/4"
1.5	3	0.015	0.003	110	15	G3/4"
1.5	3	0.006	0.005	130	7,2	G1"
1.5	3	0.015	0.005	130	7.2	G1"
2.5	5	0.01	0.005	130	19.8	G1"
2.5	5	0.025	0.005	130	19.8	G1"
3.5	7	0.014	0.007	260	8	G1 1/4"
3.5	7	0.035	0.007	260	8	G1 1/4"
6	12	0.024	0.012	260	23	G1 1/4"
3.5	7	0.035	0.012	260	5	G1 1/2"
6	12	0.024	0.012	260	14	G1 1/2"
6	12	0.06	0.012	260	14	G1 1/2"
10	20	0.04	0.02	300	*planned in 2022 Q4	G2
10	20	0.1	0.02	300	*planned in 2022 Q4	G2

SIZE AND DIMENSIONS

- Electronic unit: 116 mm x 32.5 mm x 90 mm

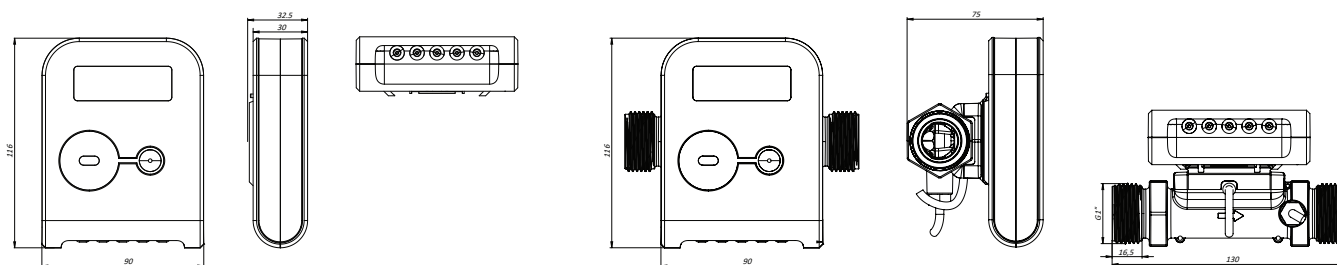

- Example - flow sensor 1,5 m^3/h , Threaded end connections G1", mounting length L=130 mm

DN [mm]	15	20	25	32	40*
L [mm]	110	130	260	260	300
H [mm]	70	75	98	106	118
G	G3/4"	G1	G1 1/4"	G1 1/2"	G2"

*Available from 2022 Q4

AXIOMA
M E T E R I N G

 metering@axioma.eu

 +370 37 36 02 34

 Veterinaru str. 52, Biruliskes, LT-54469 Kaunas, Lithuania